
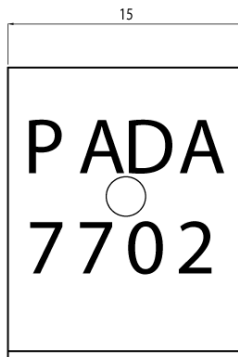


| Weight (Kg/mt) | Width (mm) | Height (mm) | RTH (C/W)* | *Length (mm) |
|----------------|------------|-------------|------------|--------------|
|                | 15         |             |            | 20           |

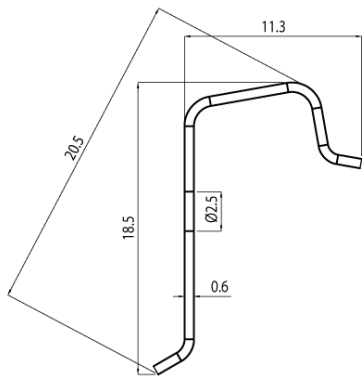

**MOUNTING INSTRUCTIONS**

**PRESSURE ON THE COMPONENT**

S=4,0mm F=3,5Kg

S=4,5mm F=4,5Kg

S=5,0mm F=5,5Kg

REMARK: CLIP IS NOT SUITABLE FOR DIFFERENT THICKNESSES.

**MOUNTING FORCE (S=5,0mm)**

HORIZONTAL: MAX 25Kg

AT 45°: MAX 15Kg

REMARK: FORCES ARE TAKEN ON HEAT SINK AT NOMINAL DIMENSIONS

**IMPORTANT REMARK**

PRESSURE ON THE COMPONENT COULD CHANGE IF THE POINT OF FORCE MOVES MORE THAN 1 MM AWAY FROM THE CENTRE OF THE COMPONENT.

